



**Landbase**  
Engineering for Natural Management

# Brackenbruiser


## Ten important features on the Landbase bracken roller

**5 Suspension units** and high quality tyres are provided for maximum mobility on and off road.

**4 Weight brackets** additional weights can be added where maximum disturbance of bracken litter is required.

**6 Rear Ball-Hitch** provides joining point to link machines together for transport

**3 Double clevis pivot** gives extra strength and allows machines to be offset or connected up in gangs.

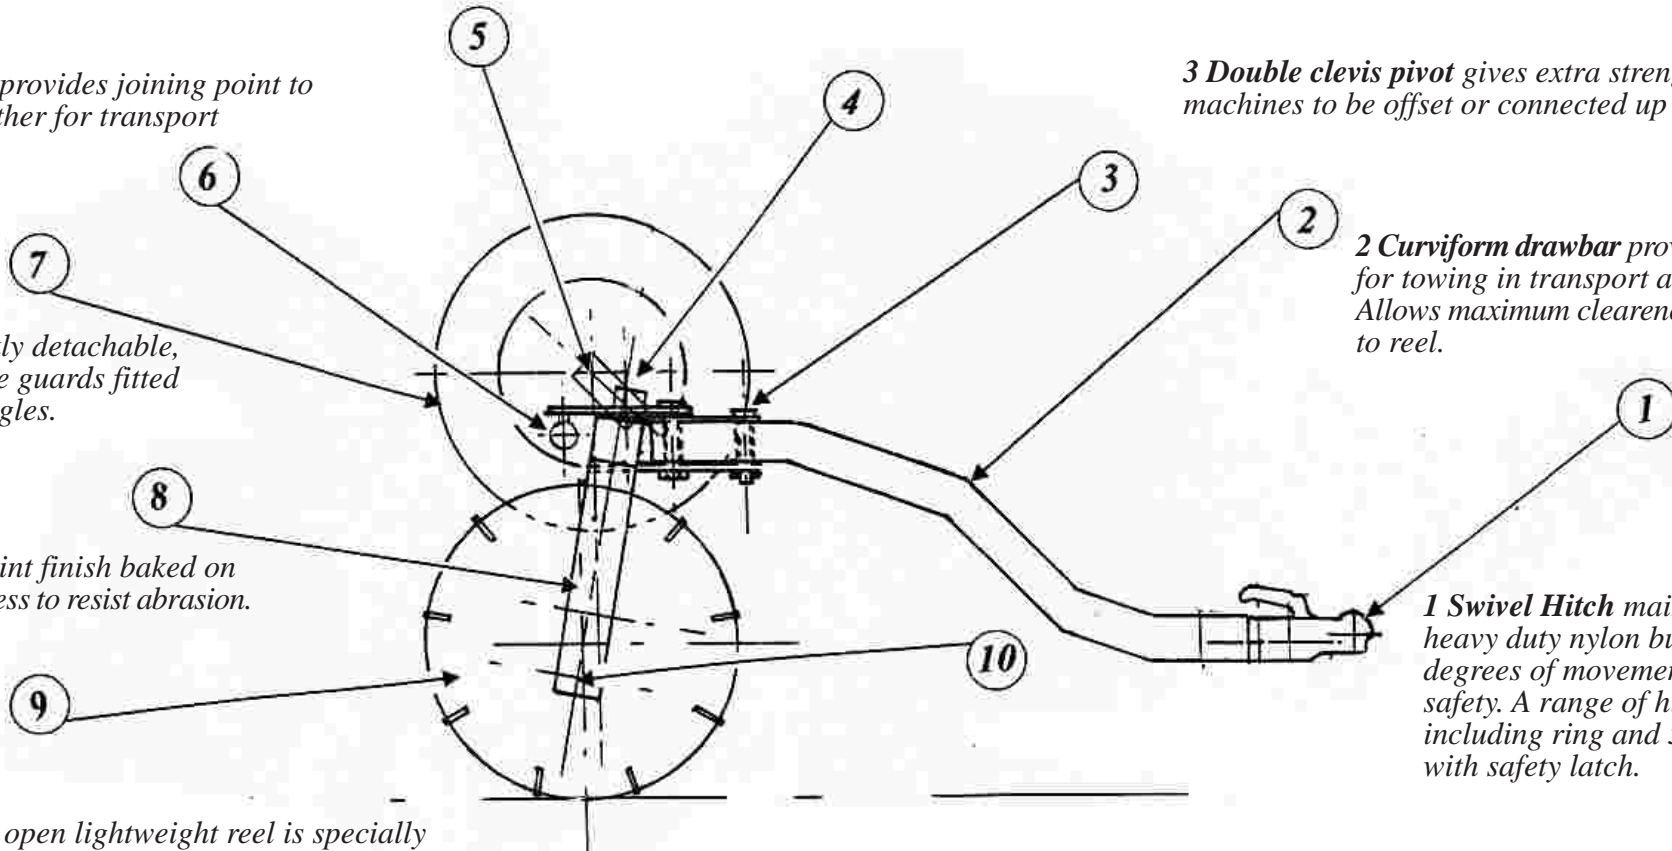

**2 Curviform drawbar** provides correct angles for towing in transport and work position. Allows maximum clearance for bracken flow to reel.

**7 Mudguards** quickly detachable, tough polypropylene guards fitted with reflective triangles.

**8 Powder-spray** paint finish baked on for maximum hardness to resist abrasion.

**1 Swivel Hitch** maintenance free heavy duty nylon bush allows 360 degrees of movement for maximum safety. A range of hitches available including ring and 50mm ball hitch with safety latch.

**9 Resile reel** this open lightweight reel is specially constructed from spring steel to effectively 'condition' bracken stems and resist shock from rocks and other obstacles.

**10 Mounting brackets** designed to allow easy connection of additional units in gangs or for off-set work to give greater work rates.